

# SAAFCarb™ MA

## ENGINEERED CHEMICAL MEDIA

- Provides targeted contaminant removal capacity for acid gases
- Provides extended equipment protection with infrequent media changeovers
- Compatible for use in all carbon-based air filtration systems
- Low pressure drop and high adsorptive capacity

### Engineered Media

SAAFCarb MA engineered gas removal chemical media is designed to efficiently remove specific gaseous contaminants from airstreams.

Target contaminants include:

- Hydrogen sulfide
- Sulfur oxide
- Nitrogen dioxide
- Volatile Organic Compounds (VOCs)

SAAFCarb MA media is manufactured exclusively for acidic corrosive environments. This media consists of cylindrical, porous pellets. The pellets are composed of pelletized activated carbon that is suitably impregnated for the removal of acid gases.

### Chemisorptive Process

The SAAFCarb MA media chemisorptive process removes impure gases by adsorption, absorption, and chemical reaction. In this process, the gas is trapped within the pellet, where a chemical reaction changes the gases into harmless solids and thereby mitigates the possibility of desorption.

### Quality Control

SAAFCarb MA media undergoes the following quality control tests:

- Apparent Density
- Ball-pan Hardness
- H<sub>2</sub>S Gas Capacity
- Moisture Content
- Pellet Diameter



# SAAFCarb™ MA Media


## Typical Properties

Apparent density:	0.6 g/cc (~37 lb/ft <sup>3</sup> ) ± 10%
Carbon description:	Impregnated
Carbon raw material:	Coal
CTC (base carbon):	60 wt % min
H <sub>2</sub> S gas capacity:	0.12 – 0.15 g H <sub>2</sub> S/cc media
Hardness:	95% min
Nominal diameter:	4 mm
Shape:	Cylindrical pellet

*Disclaimer: Typical properties are produced using AAF Flanders and industry standard test methods. They are listed for informational purposes only and are not to be used as purchase specifications. Certificates of analysis are available for specific batches upon request.*

## Performance Data

Resistance vs. Media Face Velocity

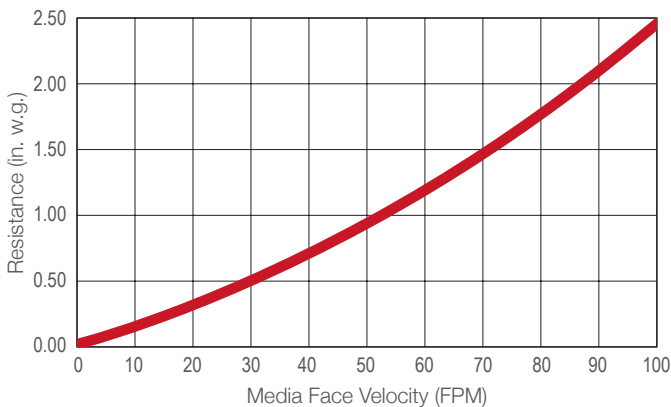

## Packaging Options and Application Guidelines

### Packaging Options

SAAFCarb MA media is packaged in one cubic foot containers and 1,100 lb. (499 kg) super sacks.

SAAFCarb MA media is also available packaged in SAAF cartridges, cassettes, and trays.

### Application Guidelines

SAAFCarb MA media performs under the following application guidelines (actual capacities and efficiencies may vary):

- Temperature: -4° to 125°F (-20° to 51°C)
- Humidity: 10% – 95% RH
- Suitable for use in commercial and industrial systems with equipment face velocities from 50 to 500 FPM (0.25 – 2.5 m/s).

## Installation and Disposal Requirements

### Installation

The installers must use dust masks, safety goggles, and rubber gloves.

### Disposal

The spent SAAFCarb MA media must be disposed of according to local, state, and federal guidelines.

### Safety

Wet activated carbon adsorbs atmospheric oxygen, causing low oxygen supply in enclosed areas or packed containers. This can be potentially hazardous for workers who enter these oxygen-depleted areas. Make sure that workers adhere to the provincial and state safety guidelines.

