

# Side Access Vee-Bank Prefilter

Part of a Total Systems Approach to Improved Indoor Air Quality (IAQ)

The Side Access Vee-Bank filter housing is engineered for use with air handling units or other side access equipment. It offers the convenience of servicing the filter from outside the air duct and is especially suited for installations involving limited headroom.

## The Vee-Bank Concept

The Side Access Vee-Bank housing is a general purpose filter housing that provides mechanical strength, ease of use and economy. The Side Access Vee-Bank housing is used when only prefilters are required and you need to double your capacity.

## Housing Features

### Access Doors

Access doors are hinged and have over-center draw-type plated latches. The doors seal against the housing using a closed cell neoprene gasket. The standard Side Access Vee-Bank is furnished with two doors.

### Rugged Construction

The Side Access Vee-Bank housing has exceptional structural strength. It utilizes 1-5/16" wide turned out flanges, welded construction, vertical supports and angle braces.

The Side Access Vee-Bank housing is designed to operate at up to 6" WG negative or positive pressure. Optional high-pressure construction is available for service up to 10" WG negative or positive pressure.

### Sizes

The Side Access Vee-Bank housing is offered in 96 sizes, spanning heights from nominal 1' through 8', and widths from nominal 1' through 12'. Capacities range from 2,000 CFM at 500 FPM to 120,000 CFM at 625 FPM.

Larger sizes are available. The Side Access Vee-Bank housing is designed to expand using standard sizes as building blocks. For example, a nominal 16' wide unit can be built using two 8' wide modules or an 8' high unit using two 4' modules. Modules are factory pre-engineered for field installation.

### Housing Depths

Two housing depths are offered: 26-3/8" (holds 2" prefilters) and 27-3/8" (holds 4" prefilters).



## Steel Skin Insulation

All Side Access Vee-Bank housings can be furnished with optional 2" fiberglass insulation. Enclosed in a double metal skin, the insulation is external to the airstream. This optional insulation covers both doors, and top and bottom pans.

### Standard

- 96 sizes
- Rugged doors
- Structurally rated up to 6" positive pressure
- 16-gauge galvanized steel
- Welded construction
- 1-5/16" flanges
- 2" or 4" prefilter tracks
- Internal bracing
- Compact design
- Factory assembled
- Easy to install

### Options

- Double skin insulation
- AHU mating flanges
- Weatherproof construction
- High-pressure construction
- Static pressure taps
- Installed pressure gauges



BETTER AIR IS OUR BUSINESS®



ENVIRONMENTAL  
SOLUTIONS

# Side Access Vee-Bank Prefilter

## Product Information


### Size Code

(Height designation) x (width designation). For example, 2H x 3W is a two filter high by three filter wide housing (based on a 24 x 24 nominal filter.)

### Capacities (CFM) and Dimensions

		Width →					
Height ↓	Designation	1	2	3	4	5	6
		Housing	26-1/8"	49-1/2"	72-7/8"	96-1/4"	119-7/8"
1	26-7/8"	4,000	8,000	12,000	16,000	20,000	24,000
2	51"	8,000	16,000	24,000	32,000	40,000	48,000
3	75-1/8"	12,000	24,000	36,000	48,000	60,000	72,000
4	99-1/4"	16,000	32,000	48,000	64,000	80,000	96,000

NOTE Capacities are based on an airflow velocity of 500 FPM. For capacities based on velocities of 625 FPM, increase capacities by a factor of 1.25. Half size filter housings are available.

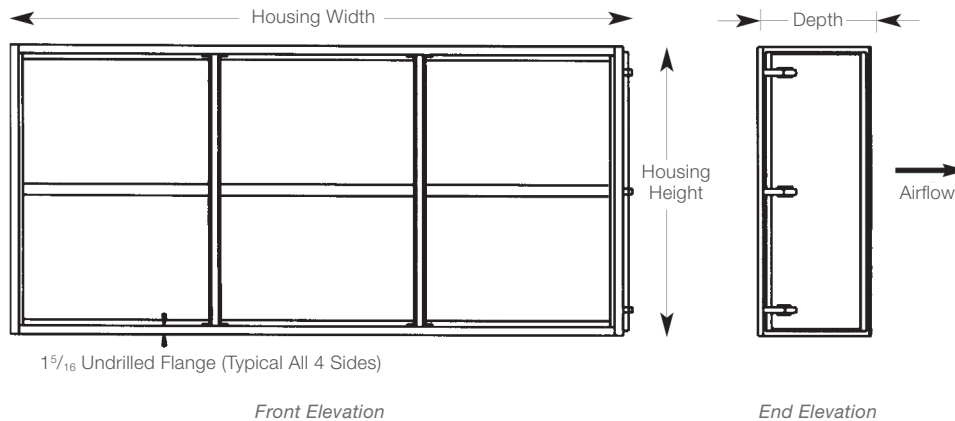

Prefilter Depth	Housing Depth
2"	26-3/8"
4"	27-3/8"

The information in this document is the property of American Air Filter Company, Inc. and its affiliated companies (collectively, "AAF") and may not be copied or distributed to any third party, or used for any purpose other than that for which it is supplied, without the express written consent of AAF.

While the information herein is provided in good faith based on information available when the document was created, it should not be relied upon as being complete or accurate, and the products advertised within this document, and their components and accessories, are subject to change without notice. AAF provides this information on an AS IS basis and makes no warranties, expressed or implied, or representations regarding same. This document does not establish, and should not be taken as establishing, and contractual or other commitment binding upon AAF or any of its subsidiaries or associated companies.

ISO Certified Firm ©2016 AAF International  
APC-1-125D



BETTER AIR IS OUR BUSINESS®

### North & South America

**AAF International**  
9920 Corporate Campus Drive, Suite 2200  
Louisville, KY 40223-5000, USA  
Tel: 1 502 637 0011  
Toll Free: 1 800 477 1214  
Email: aafep@aafintl.com